


MILD STEEL ENCLOSURES IP65


PART NUMBER	HEIGHT	WIDTH	DEPTH
DEE - V15-2520	250	200	150
DEE - V15-3025	300	250	150
DEE - V20-4030	400	300	200
DEE - V20-5040	500	400	200
DEE - V25-6040	600	400	250
DEE - V25-6050	600	500	250
DEE - V25-6060	600	600	250
DEE - V25-7050	700	500	250
DEE - V25-8060	800	600	250
DEE - V30-1008	1000	800	300
DEE - V30-1208	1200	800	300

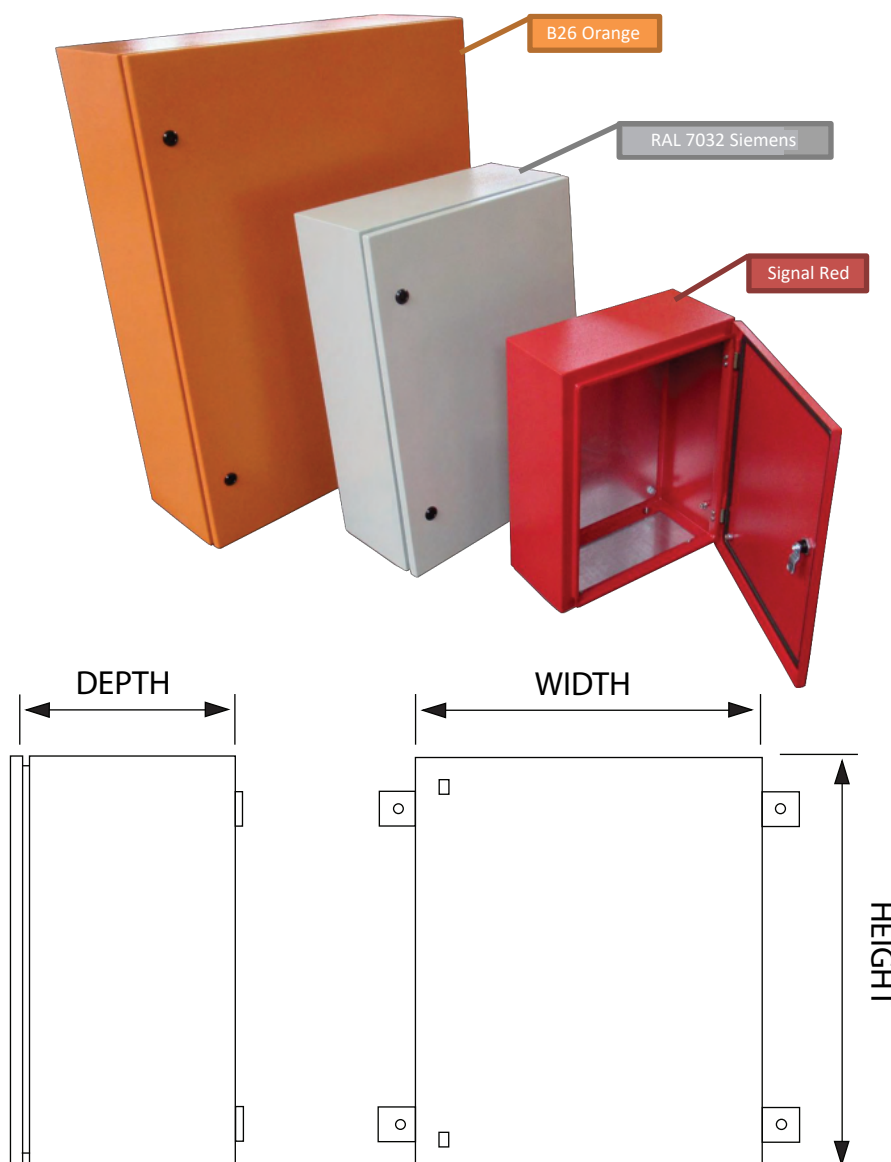

STAINLESS STEEL ENCLOSURES IP65

MATERIAL: POLISHED 304


PART NUMBER	HEIGHT	WIDTH	DEPTH
DEE - SS0	300	200	115
DEE - SS1	350	250	145
DEE - SS2	450	300	195
DEE - SS3	550	400	195
DEE - SS4	650	450	245
DEE - SS5	750	550	245
DEE - SS6	950	700	245
DEE - SS7	1150	850	245

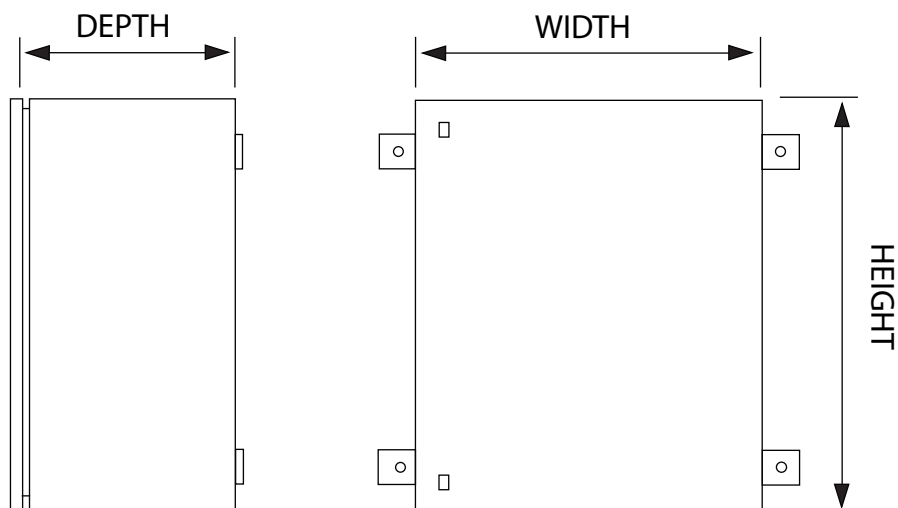

DISTRIBUTION BOARDS

PART NUMBER	5KA HEINEMAN (26MM MODULE)	2,5KA HEINEMAN (13MM MODULE)	DIN RAIL MOUNTED (13MM MODULE)	CODE OUTDOOR	CODE INDOOR	SIZE W X H X D
DEE - VIP 4-9	(27 WAY) 3 X 9	(54 WAY) 3 X 18	(39 WAY) 3 X 13	DEE - VIP 4-9 O	DEE - VIP 4-9 I	400 X 900 X 200
DEE - VIP 5-9	(36 WAY) 3 X 12	(72 WAY) 3 X 24	(54 WAY) 3 X 18	DEE - VIP 5-9 O	DEE - VIP 5-9 I	500 X 900 X 200
DEE - VIP 6-9	(45WAY) 3 X 15	(90 WAY) 3 X 30	(63 WAY) 3 X 21	DEE - VIP 6-9 O	DEE - VIP 6-9 I	600 X 900 X 200
DEE - VIP 8-9	(69 WAY) 3 X 23	(138 WAY) 3 X 46	(99 WAY) 3 X 33	DEE - VIP 8-9 O	DEE - VIP 8-9 I	800 X 900 X 200

- 1.2 MILD STEEL
- STANDARD COLOURS: (B26) ORANGE
- CODE O = ENCLOSURE IS FITTED WITH A ROOF, CODE I = ENCLOSURE IS FITTED WITH A TOP PLATE
- IP65 CONSTRUCTION

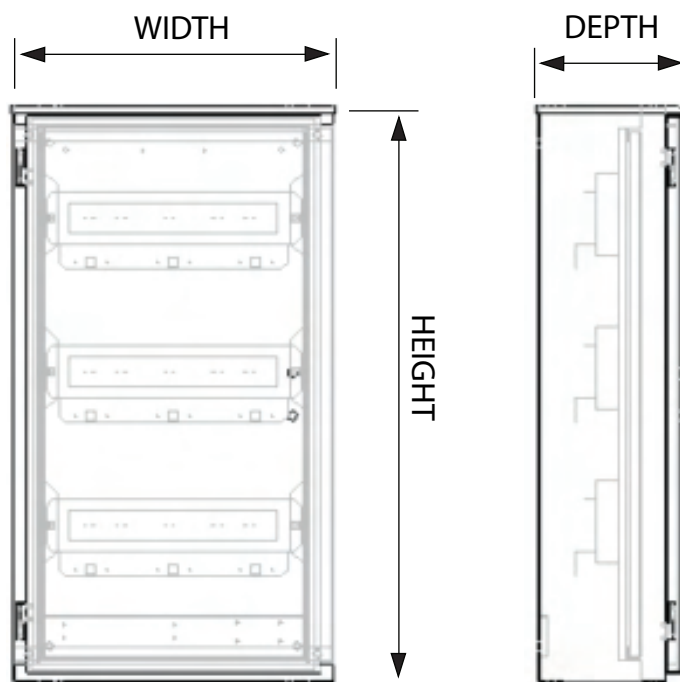

FLOOR STANDING ENCLOSURES

PART NUMBER	DEPTH	WIDTH	HEIGHT EXL. PLINTH	CHASSIS SIZE
DEE - FW-14-8-4	400	800	1400	1310 x 710
DEE - FW-16-6-4	400	600	1600	1510 x 510
DEE - FW-18-8-4	400	800	1800	1710 x 710
DEE - FW-18-8-6	600	800	1800	1710 x 710
DEE - FW-20-10-6	600	1000	2000	1910 x 910

- 2MM MILD STEEL WITH 3 FIXED SIDES
- STANDARD COLOURS: (B26) ORANGE
- INCLUDES 100MM PLINTH, FIXED CHASSIS PLATE, REMOVABLE TOP AND BOTTOM GLANDPLATE
- LOCKABLE 3 POINT LEVERLOCK SYSTEM
- IP54 CONSTRUCTION

