


TECHNICAL DATA SHEET

POLYCARBONATE BANK UNIT DATA SHEET

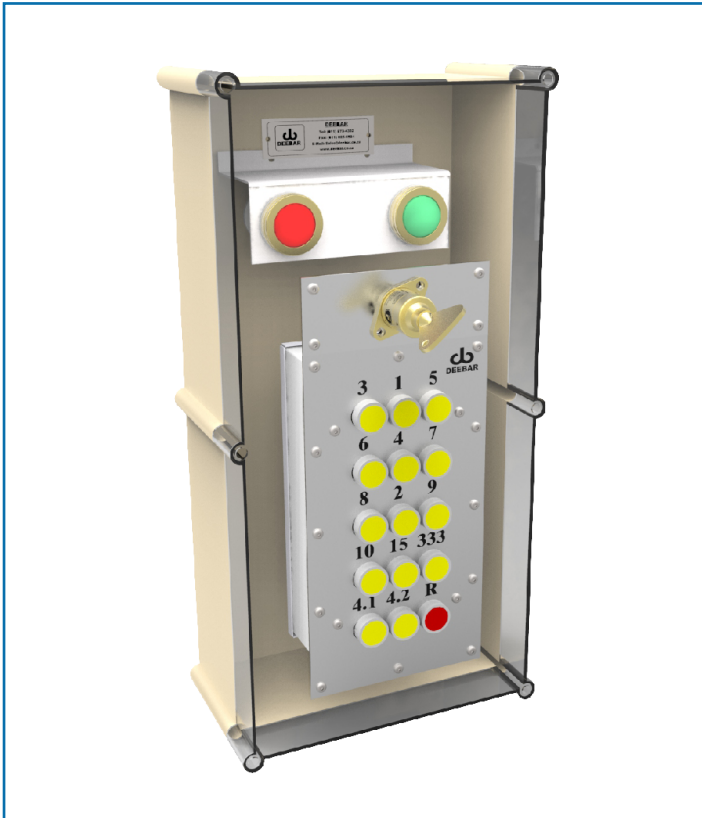

PRODUCT DETAILS

The purpose of this unit is to communicate between the Banksman and the driver and is situated on the bank

The unit is manufactured in polycarbonate and equipped with:

- Push button signalling device to communicate to the driver.
- Evolution or D-Tronic PC Board.
- Fitted with a PP, Castell or Fortress key switch.
- Various audible devices, such as bell, sounder, cybertone, etc.
- Lock & clear lights are fitted behind the lid of the enclosure ensuring its IP65 rating.

The unit is available in either 32V / 110V AC or 32V DC.

Note: The unit has a switch off facility feature and always completes every signal rung.

Various Signalling Units can be manufactured in Polycarbonate as per customer specifications.

Product Code:	Description:
*9504.04	c/w Castell K/switch
*9504.05	c/w PP K/Switch

DIMENSIONAL DRAWING

